


Supercrete

CRDS-28


Construction R-values for Ground Suspended floor



	Area/Perimeter Ratio				
	1.0	2.0	3.0	4.0	5.0
Continuous perimeter wall, sheltered from wind (e.g. garage or foundation wall)	0.1	0.2	0.3	0.4	0.5
Continuous perimeter wall, exposed to wind (e.g. garage or foundation wall)	0.05	0.11	0.17	0.22	0.28
Exposed floor (e.g. pole house or timber piles)	0	0	0	0.01	0.01

Add the R-value for the ground under a suspended floor to the R-value for the suspended floor system

Construction R-values for Ground under Suspended Floor

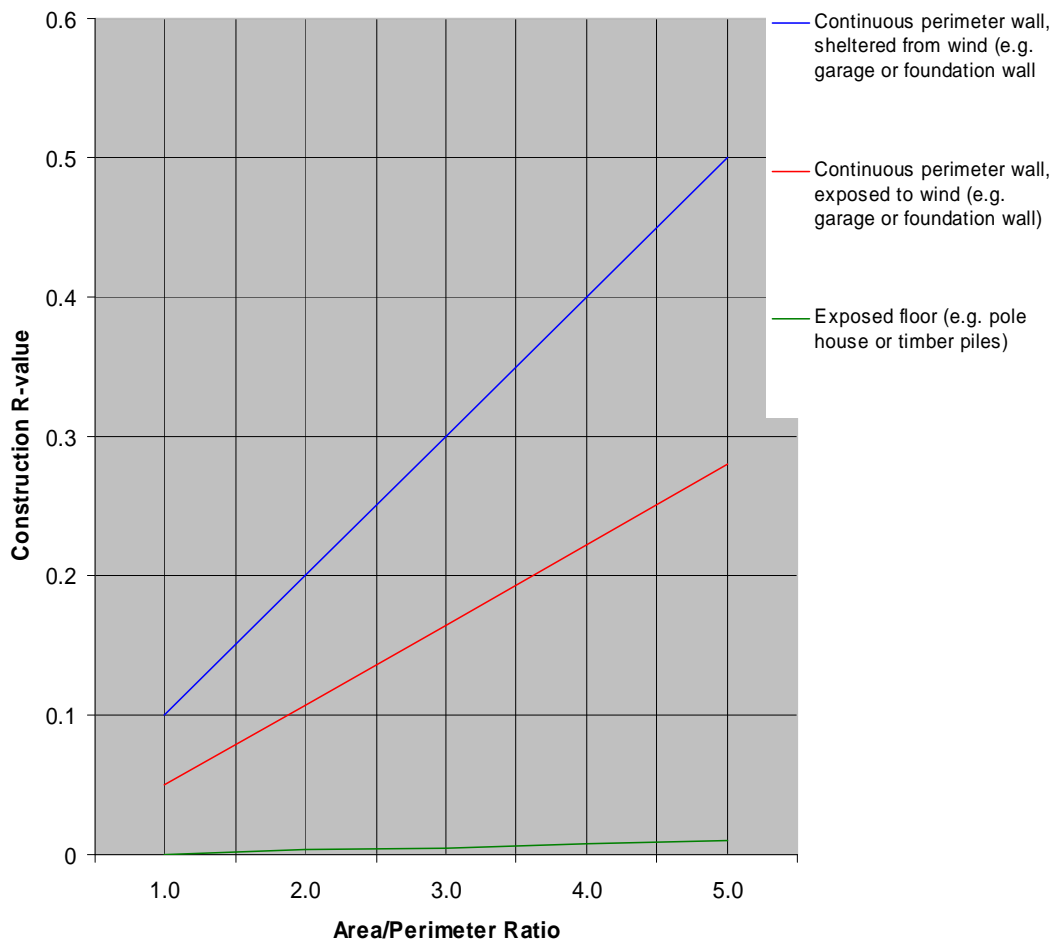

Hebel

Supercoat